


Website:

Phone: (632) 8527-8261

Email: solanda@solanda.com

PHILIPPINES 1002

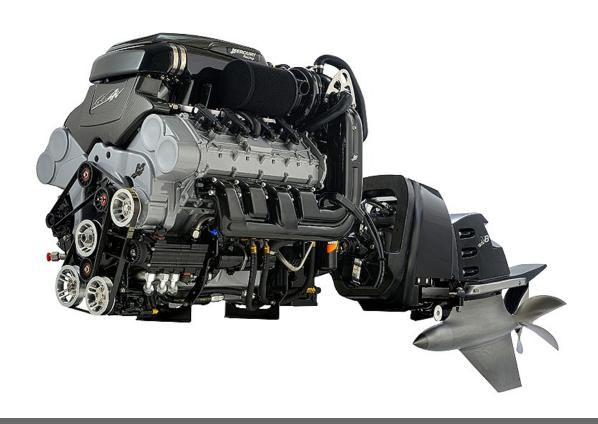

# Mercury 1650 Racing Sterndrive POA

# Specifications

### **Boat Details**

Price POA Boat Brand Mercury Model 1650 Racing Sterndrive Length 0.00

Year 2024 Category Boat Engines and Outboards

Hull Style Hull Type
Power Type Stock Number

ConditionNewStateQueenslandSuburbGLADSTONEEngine MakeMercury

# Disclaimer



Website:

Phone: (632) 8527-8261 solanda@solanda.com

Email:

PHILIPPINES 1002

# **Description**

**SPECIFICATIONS** 

Mercury 1650 Racing Sterndrive - The 1650 is based on the same four valve technology with quad cams and dry sump efficiency as its consumer siblings. Larger turbochargers, packed with an improved compressor wheel design, provide greater airflow for enhanced power and torque. The 9.0 liter quad cam four valve (QC4v) cylinder block and head design, combined with SmartCraft Digital Throttle & Shift (DTS), provides big power with luxury-car-like drivability. The DTS system also features one- touch Smart Start and automatic throttle synchronization, as well as shadow mode for triple or quad engine applications (where two throttle levers operate all engines). Zero Effort Digital controls provide an intuitive control experience - precisely signaling driver intent to the potent powerhouses.

The 1650 is close-cooled for more uniform temperature distribution, optimal running quality and longer life. Closed cooling, combined with a ball bearing supported compressor shaft, enhances 1650 turbocharger performance and durability as well.

Offshore racers will appreciate Mercury Racing's proprietary pulse-separated exhaust tuning which keeps turbos "spooled up," virtually eliminating throttle lag and low-end torque deficit.

Crankshaft-rated Horsepower □□□1650 (1230 kW)
Full Throttle RPM Range □□□6500-6800
Displacement Liter/CID □□□9.0/552
Bore (in/mm) □□□4.57/116
Stroke (in/mm) □□□4.21/107
Compression Ratio □□□7.8:1
Cylinders DDDV-8
Alternator (amp/watt) 00105/1481
Controller DDPCM distributorless
Fuel System [][]Sequential Fuel Injection
Fuel Requirements □□□112 AKI Sunoco Supreme or equivalent race fuel
Transmission □□□Mercury Racing dry-sump hydraulic
Drive Unit Dry-sump M8
Gear Ratio □□□Application dependent (contact Mercury Racing for additional information)
Length (in/mm) □□□26.69/678
Width (in/mm) □□□34/864
Height (in/mm) □□□29/737 (from crankshaft centerline)
Weight (lbs/kg) □□□1720/782
Warranty       None*
*This product is highly specialized and produced in limited quantities for sale, without warranty, to qualified

# **Features**

Horse Power (hp) 1650

powerboat racing professionals.

#### Disclaimer

Our company offers the details of this vessel in good faith but cannot guarantee or warrant the accuracy of this information nor warrant the condition of the vessel. A buyer should instruct his agents and/or surveyors to investigate such details buyer desires validated. This vessel is offered subject to prior sale, price change or withdrawal without notice.



Website:

Phone: (632) 8527-8261

Email: solanda@solanda.com

PHILIPPINES 1002

**Engine Details** 

Engine Make Horse Power Mercury 1650

# Disclaimer